



Return mounted installation

First start by turning off your pool filter pump.

Remove the in-wall return eyeball fitting.



Left in place is the wall fitting.

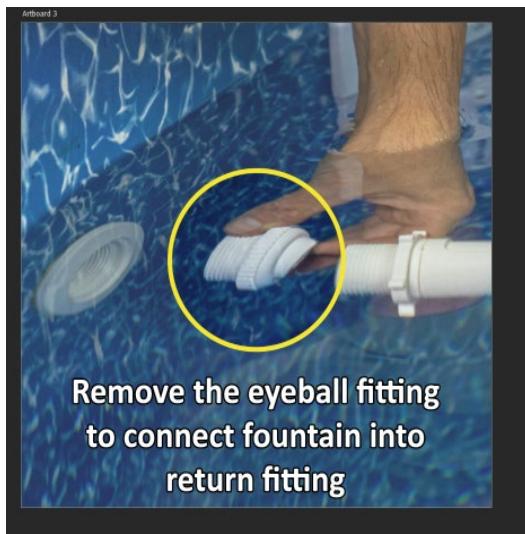

You can now thread the fountain fitting into the return. Adjust flow valve to desired height for your pool after you turn pump back on.