



QUICK START GUIDE


TracVac

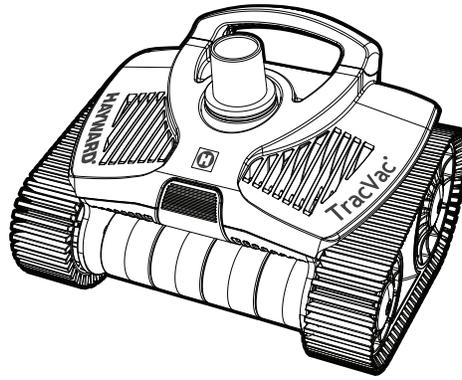



What's Included

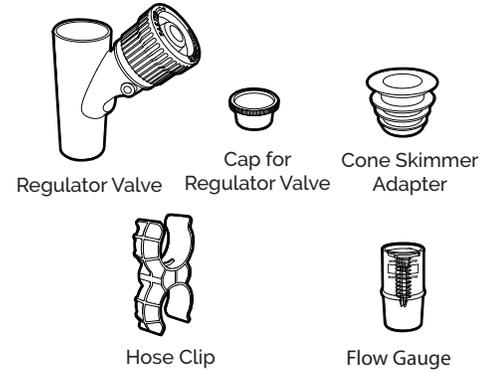

Pump Off

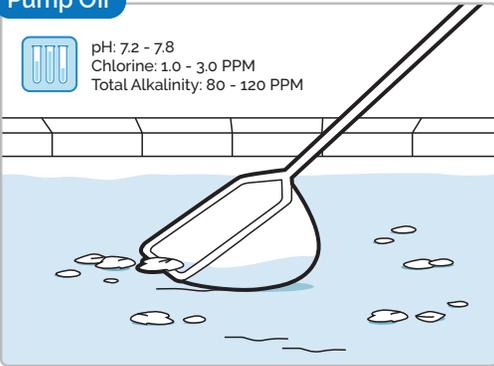


pH: 7.2 - 7.8
Chlorine: 1.0 - 3.0 PPM
Total Alkalinity: 80 - 120 PPM

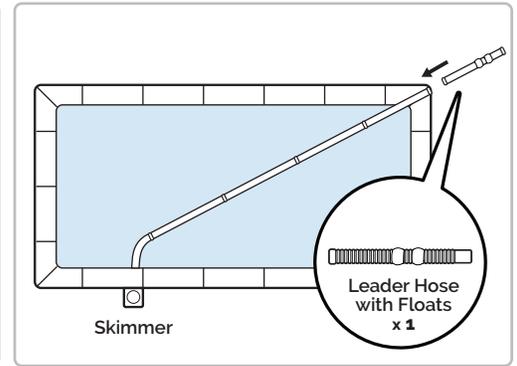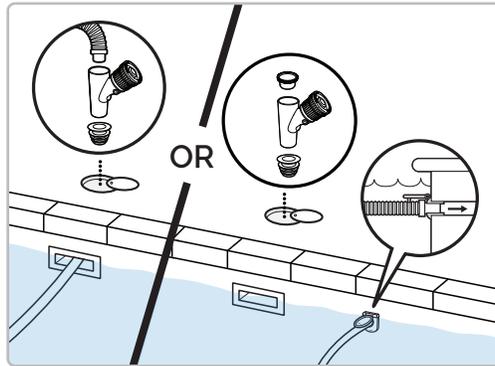


1 Clear debris, check pool chemicals

2 Main connection (Skimmer or Suction Port)


3 Determine hose length from Skimmer to the farthest point

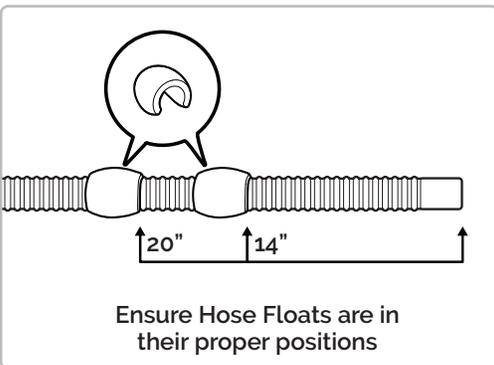

Ensure Hose Floats are in their proper positions

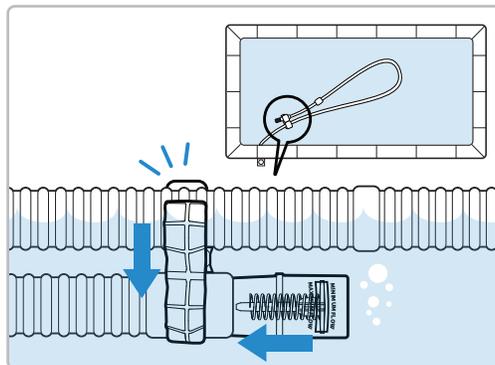

Pump On


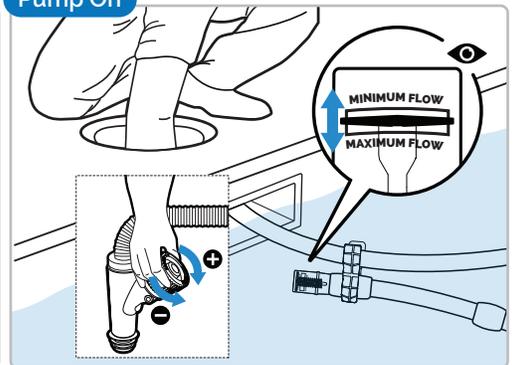


4 Attach Hose Float to leader hose

5 Loop hose back and clip near Skimmer or Suction Port with Hose Clip, attach Flow Gauge

6 Turn pump on, adjust flow with regulator or system pump and valves as needed

Pump Off

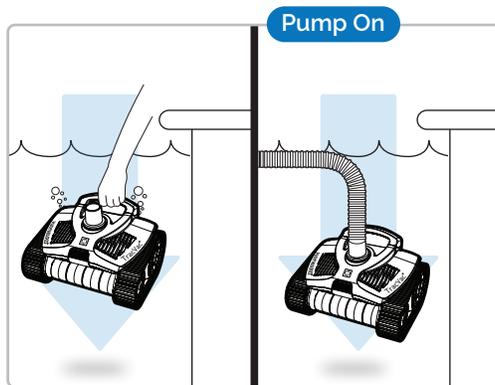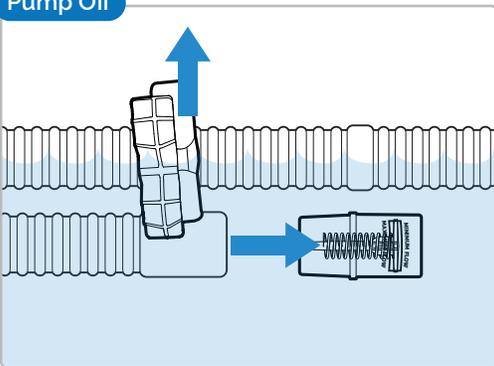

7 Turn pump off, remove Gauge & Hose Clip, keeping hose submerged

8 Submerge cleaner, connect hose, turn pump on

