


SPLASHER FILTER

XPF 25P 110 V 60HZ



To start filter set up remove spring clamp.


Please note the line up tab on lid and tank so when replacing lid on tank that it lines up properly.

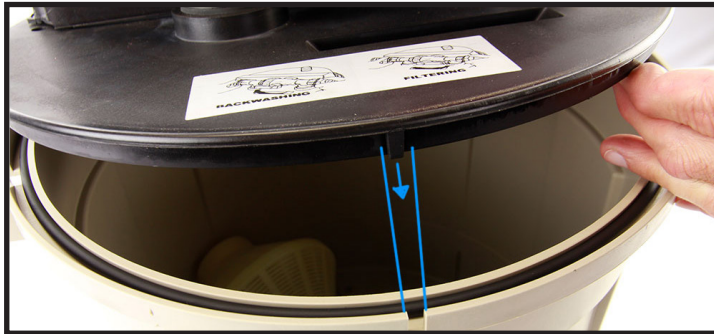

Please note stand pipe and positioning it in place.
(This must be done before adding sand)

Place lid back on tank making sure lid lines
with the stand pipe.

Once stand pipe is in place. Hold it steady as you add sand so it stays in position. Holds 35-50lbs #20 grade pool filter sand.

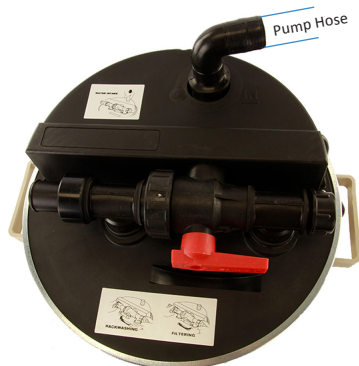

You can now connect 1 ¼" hoses with clamps.
(Hoses and clamps not included)

Hose from pool suction port goes to pump elbow.
(This is the pump suction connector)

ITEM # SNPXF25P



SPLASHER FILTER

XPF 25P 110 V 60HZ



Connect the return hose with clamp on the hose adapter portion of the valve.

Before you start filtering pool you will want to make sure you backwash any impurities and dust out of the new sand. Make sure handle on valve is in the backwash position. (see label) Temporarily remove hose adapter and end cap, put end cap on hose adapter side to change flow of filter. Run for about 1 minute to flush out impurities and dust. Turn off pump and replace cap and hose adapter.

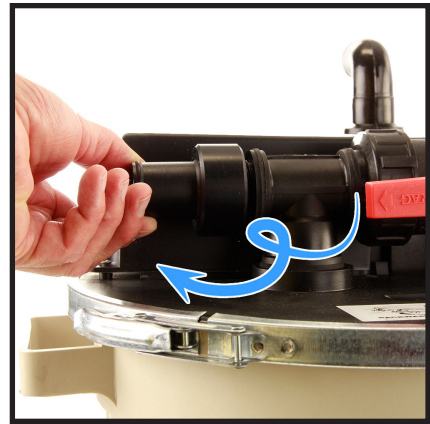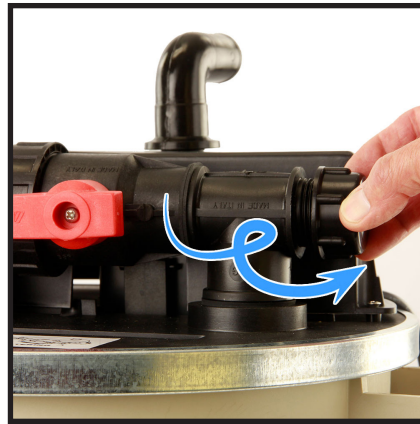

With pump off
Make sure to return handle to filtering position (see label)



Now you're ready to start filtering your pool.
(Plug in filter pump to start filtering your pool)

ITEM # SNPXPF25P