



Ocean Blue A-Frame Pool Ladder

Instructional Manual | #832097



Watch our video
assembly instructions

Scan the QR code to watch

HERE TO HELP

CONTACT US BEFORE RETURNING YOUR ITEM

Save time and hassle with our help!

Our specialists can guide you through setup, maintenance, or warranty needs.

Aqua Select® is here to make your experience simple and worry-free. If you have a question, concern, or need help with your Aqua Select® product, our friendly support team is ready to assist.



Get Support Fast! Scan • Call • Visit

- Installation Guidance
- Maintenance & Use
- Storage & Off-Season Care
- Warranty Claims
- Missing or Damaged Parts
- Return or Exchange Questions





or visit us directly at
www.poolsupplies.com/help-AS


1.800.735.5386

Assembly Instructions

Please Read Before Attempting Assembly

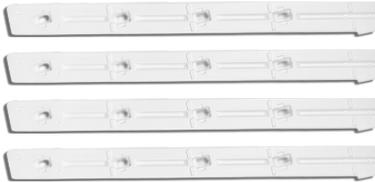(A) Side Rails

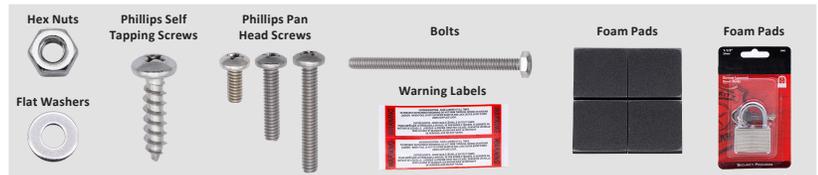(B) Swing Up Treads

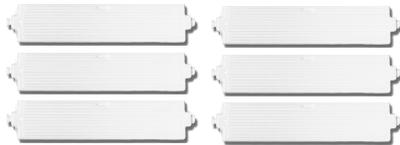(C) Hardware Pack

(D) Bottom Swing Up Treads

(E) Fixed Ladder Treads

(F) Platform

(G) Left Adjustable Rail Boots

(H) Handrails

(K) Right Adjustable Rail Boots

(M) Anti-Swim Barrier

(N) Anti-Swim Barrier Extension

(P) Swing Up Rails


Parts List

- (A) Side Rails
- (B) Swing Up Treads
- (C) Hardware Safety Pack
- (D) Bottom Swing Up Tread
- (E) Fixed Ladder Treads
- (F) Platform
- (G) Left Adjustable Rail Boot
- (H) Handrails
- (K) Right Adjustable Rail Boot
- (M) Anti-Swim Barrier
- (N) Anti-Swim Barrier Extension
- (P) Swing Up Rails

Hardware Pack

- (20) 1/4" - 20 hex nuts
- (20) 1/4" - 20 x 1 1/4" Philips pan head screws
- (8) 1/4" - 20 x 1 1/2" Philips pan head screws
- (8) 1/4" - 20 x 5/8" Philips pan head screws
- (4) 1/4" - #10 x 3/4" Philips selftapping screws
- (2) 1/4" - 20 x 3 1/2" Bolts
- (2) 1/4" Flat Washers
- (1) Strip of Foam Pads (4 pads)
- Instructions
- Warning Labels
- Padlock

Tools Needed for Assembly

- Rubber Mallet
- Power Drill
- 5/16" Drill Bit
 - Phillips Bit

HELP IS A SCAN AWAY

Watch as we assemble this A-Frame Ladder.

Go directly to the video by scanning this QR code



Hardware Pack Identification

Identify your hardware by holding it against the life-size images on this page to confirm the correct piece.



Hex Nuts
Size: 1/4"
Qty: 20



Flat Washers
Size: 1/4"
Qty: 2



Phillips Self Tapping Screws
Size: 1/4" - #10 x 3/4"
Qty: 4



Phillips Pan Head Screws
Size: 1/4" - 20 x 5/8"
Qty: 8



Phillips Pan Head Screws
Size: 1/4" - 20 x 1 1/4"
Qty: 20



Phillips Pan Head Screws
Size: 1/4" - 20 x 1 1/2"
Qty: 8



Bolts
Size: 1/4" - 20 x 3 1/2"
Qty: 2

Additional Included Parts

Not to Scale



Foam Pads




Padlock



Warning Labels

Step #1

Parts Needed: P (x2), B (x3), D (x1)

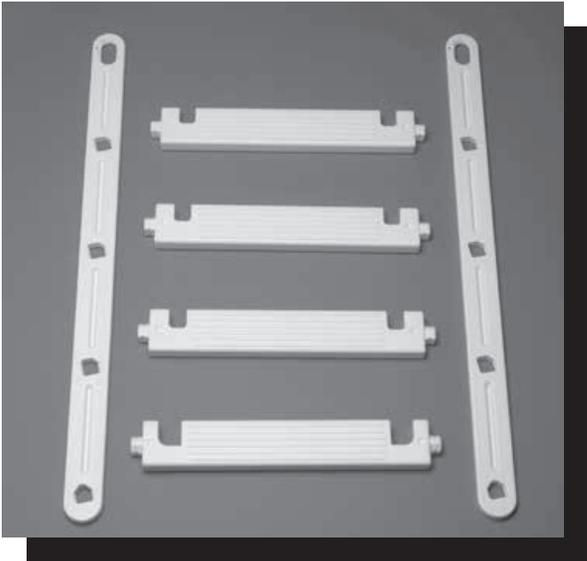

- A** Lay-out the Swing Up Rails (P) and Swing Up Treads (B & D) as shown.

NOTE: The bottom Swing Up Tread (D) has a "house shaped" tab that indicates the bottom of the ladder and is positioned at the bottom of the swing up rail pointing upwards.



- B** Using a rubber mallet, tap the Swing Up Treads into place.



- C** Place the other Swing Up Rail over the tabs of the Swing Up Treads, making sure the pegs align. Tap into place using rubber mallet. Set this assembly aside.

Step #2

Parts Needed: A (x4), G (x2), K (x2)

Adjustable Rail Boots are not required if the outside height of your pool (measured from the ground to the top of the pool ledge) is 48". If this measurement is more than 48", rail boots will be required. If the outside measurement of your pool is 48", skip to Step 3.



A Slip one of the Left Adjustable Rail Boots (G) over the bottom end of a Side Rail (A). It will need to be all the way on the Side Rail. After measuring the inside or outside height of your pool wall, adjust the Rail Boot to the proper height indicated on the Side Rail. Use the lines on the Side Rail as a guide to properly set the height.



B Using two $\frac{1}{4}$ " - 20 x 1 $\frac{1}{2}$ " bolts and two $\frac{1}{4}$ " - 20 hex nuts, fasten the Left Adjustable Rail Boot (G) to the Side Rail (A). Repeat for the remaining three Side Rails; you will end up with 2 Left and 2 Right Side Rails.

HARDWARE NEEDED

Phillips Pan
Head Screws



Hex Nuts




Step #3

Parts Needed: H (x4), F (x1), A (x2), E (x5)

Note for 48" Pools: Use E (x4) and 1 aside



A Overlap the flat end of the Handrail onto the top of the Side Rail. Using two $\frac{1}{4}$ " - 20 x $\frac{5}{8}$ " bolts and two $\frac{1}{4}$ " - 20 hex nuts, attach the Handrail to the Side Rail. Repeat for the remaining three Side Rails.

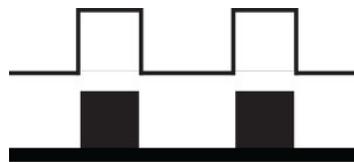

Drawing of how the pieces fit together

HARDWARE NEEDED

Phillips Pan
Head Screws


Hex Nuts



B Lay one of the Side Rail assemblies on a flat surface. Matching the tabs on the Ladder Treads to the notches in the Side Rail assembly. (The small groove should face the inside of the ladder) Use the rubber mallet to tap the treads into place.



NOTE: The Tread nub needs to be tapped into the groove; sliding it downward to secure.

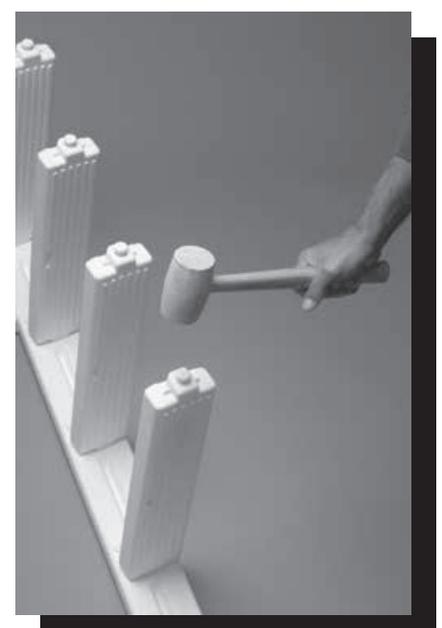

TIP: This is easiest to do if you work from the bottom step to the top step.

Step #3 (cont.)

Parts Needed: H (x4), F (x1), A (x2), E (x5)

Note for 48" Pools: Use E (x4) and 1 aside




C Placing your foot on the Side Rail to hold it steady, use the rubber mallet to tap down the Fixed Ladder Treads until they are firmly seated in the Side Rail.

TIP: Complete each step one at a time to prevent them from falling over until all are assembled.




D Place the opposite Side Rail assembly on top of the Fixed Ladder Treads so that the notches and tabs align and tap it into place. Placing your foot on the Side Rail to hold it steady, use the rubber mallet to tap down the Fixed Ladder Treads until they are firmly seated into both Side Rails.

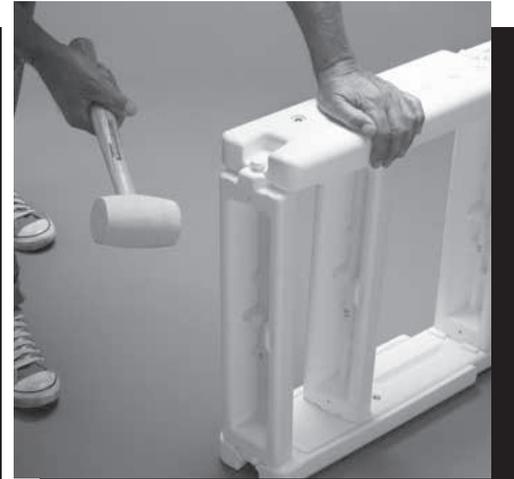


E With ladder assembly on its side, position one of the remaining Fixed Ladder Treads (E) so that the tabs align with the bottom notches of the Side Rail assemblies and tap in with the rubber mallet until the tread is properly seated.

48" Pools
Skip Step
E

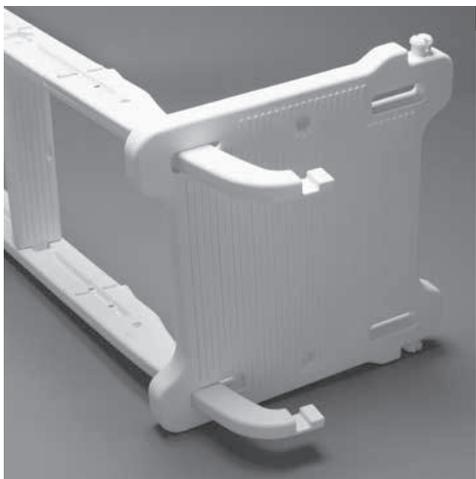

F Make sure to face the swing up tabs on platform away from you. Use the openings opposite of the tabbed end and slide the Platform (F) over the two Handrails (H).

Using the rubber mallet, tap the Platform down until seated on the lugs on the Side Rails.

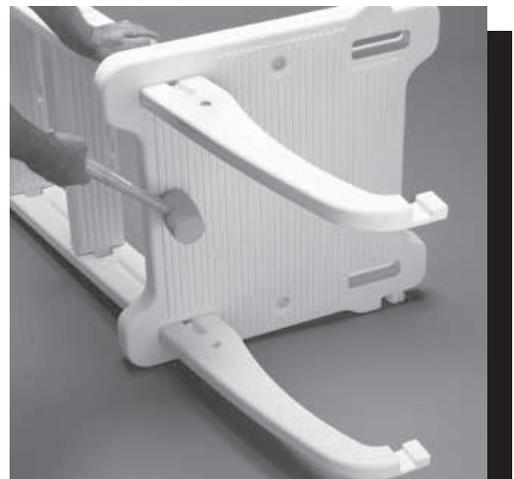


G

Step #4

Parts Needed: M (x1), N (x1)




A Lay the Anti-Swim Barrier (M) and its Extension (N) on a flat surface.

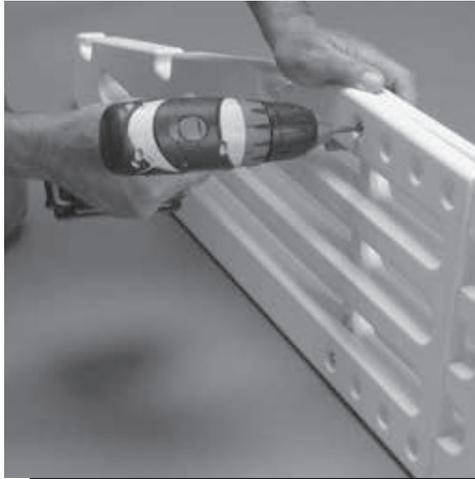

B Position the Anti-Swim Barrier Extension over the Anti-Swim Barrier so that the length of the Barrier matches the length from the top tread to the bottom tread of the ladder. Attach with two 1/4" - 20 x 1 1/4" bolts and two 1/4" - 20 hex nuts.



C Using the rubber mallet, tap the Anti-Swim Barrier into place.

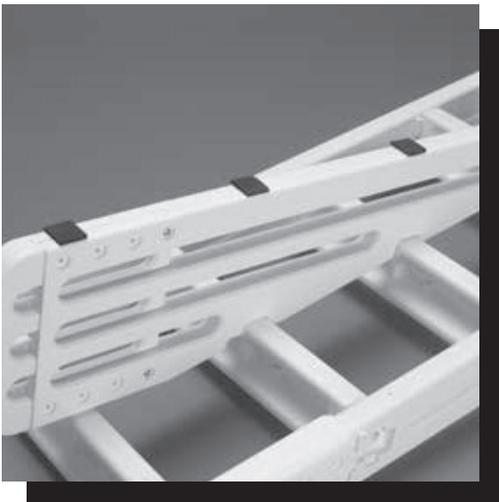

D Evenly space the foam adhesive pads to the Barrier.

HARDWARE NEEDED

Phillips Pan
Head Screws



Hex Nuts



Step #5

Parts Needed: Assembled A+H (x2), E (x1)

Note for 48" Pools: Do not use E (x1) and set this piece aside




A Flip entire ladder assembly onto its side. Slide the two remaining Side Rail assemblies through the two openings on the tabbed end of the Platform.



Using the rubber mallet, tap down on the Platform until it is seated against the lugs on the Side Rails.

NOTE: IT MAY REQUIRE SEVERAL HARD BLOWS WITH A RUBBER MALLET TO SEAT THE PLATFORM ALL THE WAY DOWN ONTO LUGS.

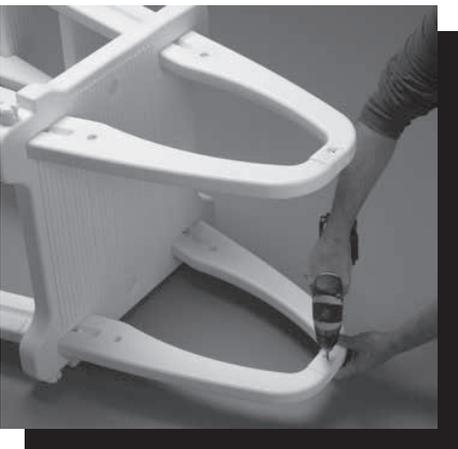

HARDWARE NEEDED

Phillips Self Tapping Screws



B Using two #10 x 3/8" self tapping screws, connect the Handrails together by using one screw on the outside and one screw on the inside. Repeat for the remaining handrail.



C Position the remaining Fixed Ladder Tread (E) so that the tabs align with the notches at the bottom of the Side Rail assemblies and tap in with the rubber mallet until the tread is properly seated. **NOTE:** The small groove should face the inside of the ladder.

**48" Pools
Skip Step
C**

Step #5 (cont.)

Parts Needed: Assembled A+H (x2), E (x1)

Note for 48" Pools: Do not use E (x1) and set this piece aside



D Stand the ladder upright. Align Swing Up Rails to the notch attached to platform while assembling the Swing Up portion to the rest of the ladder. Attach the Swing Ladder assembly by flexing the oval openings over the two round tabs on the Platform.



E Using the rubber mallet tap down to secure.

Step #6

Placing A-Frame Ladder In Pool

CHOOSE A LOCATION THAT IS LEVEL AND IN FULL VIEW.

POOL MUST HAVE COMPETENT ADULT SUPERVISION AT ALL TIMES WHEN IN USE.

A Carefully lift the ladder over the pool wall making sure the Swing Ladder is on the outside of the pool. Be careful not to damage liner or pool wall. The platform must be level and should rest on or just above the pool top seat and the bottom tread should rest firmly on the pool bottom. Depending on the outside height of the swimming pool ledge, rail boots may need to be readjusted at this time.


*Use of a ladder pad is highly recommended to protect pool liner.



B Tip the ladder sideways (45° angle) to allow the treads to fill with water (and let the bubbles out). This will prevent floating. Allow ladder to fill with water until it settles on the bottom of the pool. Small holes in the side rails will let the water in. This may take a few minutes.

Check to make sure the hole locations in the platform are clear of pool wall and supports. **C** Drill two $\frac{5}{16}$ " holes through the Platform and pool top ledge. Fasten the ladder platform to the pool ledge using two washers, two $\frac{1}{4}$ "-20 x 3 $\frac{1}{2}$ " bolts, and $\frac{1}{4}$ "-20 hex nuts.

You MUST secure the ladder to the pool top rail for strength and stability.

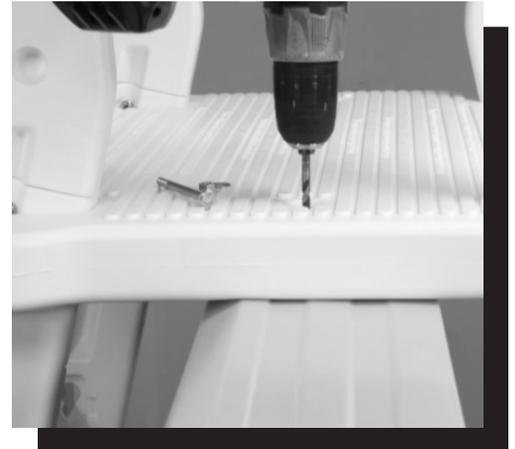


HARDWARE NEEDED

Hex Nuts



Bolts



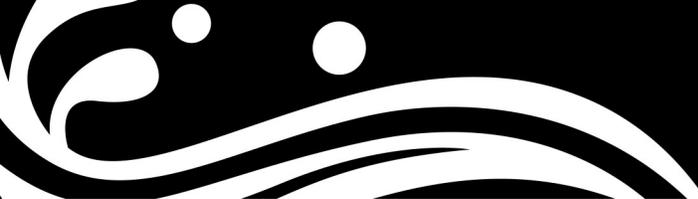

Step #6 (cont.)

Placing A-Frame Ladder In Pool

CHOOSE A LOCATION THAT IS LEVEL AND IN FULL VIEW.
POOL MUST HAVE COMPETENT ADULT SUPERVISION AT ALL TIMES WHEN IN USE.



D When the pool is not in use, rotate the Swing Ladder to the up position and secure it in place with the padlock as shown.

OUTSIDE TREADS MUST BE IN THE UP POSITION AND LOCKED AT ALL TIMES WHEN POOL IS NOT IN USE.



Scan QR code to purchase

Available for Purchase

A-Frame to Deck Ladder Conversion Kit
#832097C



This conversion kit easily converts an A-Frame ladder into an in-pool ladder. With minimal hardware for easy assembly, the conversion kit is extremely durable.

Safety Rules

- Locate ladder on a solid base.
- One person on the ladder at a time.
- Ladder **MUST** be installed per these instructions.
- Secure ladder to top rail of pool for greater stability and safety as outlined in this assembly manual. **Use of a ladder pad is highly recommended to protect pool liner.**
- **DANGER:** No Jumping or Diving from ladder.
- Face ladder when entering and leaving pool.
- To prevent entrapment or drowning — **DO NOT** swim through, behind or around ladder.
- Ladder to be used as a swimming pool ladder only.
- Weight limit - 300 lbs. maximum
- Warning: Exceeding the maximum weight restriction may cause the ladder to fail.
- When ladder is not in use, swing up outside ladder section and lock using padlock. Ladder must be locked at all times when not in use or when there is no qualified adult supervision.
- Consult your local Building Department before installation of your pool and equipment.
- **DANGER:** Use a cordless drill for assembly and installation. **NEVER** use an electric drill in or around the pool.

Aqua Select® Products Warranty

Aqua Select® warrants their swimming pool ladders to be free from defects in workmanship for one year from date of purchase. Contact us for warranty claims and questions.



Scan QR code to contact us

IMPORTANT For Your Safety

- Check the contents of the carton with the parts list for this ladder.
- **DO NOT** attempt to assemble or install the ladder if there are **ANY** shortages of parts or hardware.
- For proper assembly and installation follow all instructions in the sequence shown.
- Before using the product, after assembly and installation, go over the instructions and procedures again to make sure nothing has been overlooked.
- Be sure and safe. The manufacturer IS NOT responsible for improper assembly, installation and use.

**Not for Use with
Soft Sided Pools**

MAINTENANCE

To keep your new ladder working properly, just hose off once a week with clean water. Check the Swing Up Ladder for proper operation. Check padlock for proper operation, lubricate if necessary.

WINTERIZING

Unfasten the ladder from pool ledge and remove from the water. Lay the ladder on its side to drain. It will take several minutes for the water to drain out of the ladder rails. A small amount of water left in ladder will not cause any damage. Store in a safe place out of the elements.