


# SKIMMER DOOR™

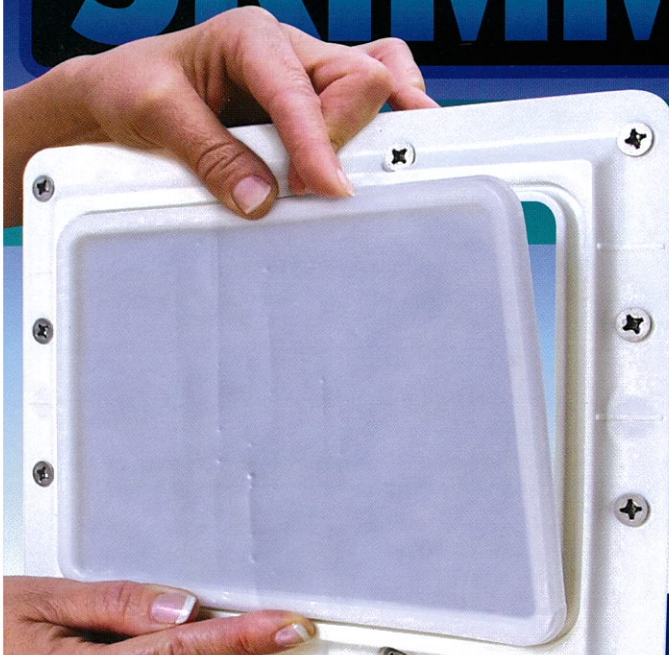

## WINTERIZE YOUR SKIMMER – WITH AN EASY SNAP-ON DOOR!

- ◆ Skimmer Door™ lets you drain your skimmer, not your pool, and prevents costly freeze damage to the skimmer.
- ◆ The recessed design prevents shifting ice from removing the door once it is snapped in place.
- ◆ **Guaranteed not to leak!** UV and chemical-resistant, good to minus 80°F below zero.
- ◆ Optional snap-on Skimmer Guard™ is available to prevent toys, floats etc. from blocking your skimmer during the swim season.  
(Skimmer Guard™ sold separately)

US & Foreign Patents - 7,011,747 / 7,390,401 / 7,413,651  
See reverse side for installation instructions.  
**Made in the USA.**

 **Super.Pro**  
genuine replacement part

### This kit includes:

1x Skimmer Door  
1x Skimmer Door  
Faceplate

**MODEL #**  
**AG1090**

**Fits standard aboveground skimmers, including:**  
Hayward® 1090, 1092, 1094, PoolStyle®, Hydrotools®, American  
Products®, Jacuzzi®, Muskin®, Olympic®, Waterway®, and oth  
[www.skimmerdoor.com](http://www.skimmerdoor.com) **#SPG-251-600**



# SKIMMER DOOR™

## INSTALLATION INSTRUCTIONS

**NOTE:** Skimmer gaskets **DO NOT** come with the **SKIMMER DOOR™**. On new pool installations simply install the new gaskets that came with your skimmer. On existing pools it is highly recommended that you replace your skimmer gaskets when installing **SKIMMER DOOR™**.

\* If gaskets are torn or show any wear they **MUST** be replaced.

### ITEMS REQUIRED:

- #3 Phillips head screwdriver
- O-Ring lubricant
- New skimmer gaskets \**see recommendations above*

### PREPARATION:

**NEW POOLS:** **SKIMMER DOOR™** should be installed prior to completely filling your pool with water.

**EXISTING POOLS:** Drain pool water just below the skimmer's opening, 1" - 2". Assemble required items.

### INSTALLATION:

- 1) Remove existing skimmer faceplate using a #3 Phillips head screwdriver. Keep the screws; you will be using them to reinstall your **SKIMMER DOOR™** mounting plate.
- 2) Inspect gaskets and replace if necessary. *See above recommendations.*
- 3) Align gaskets and new **SKIMMER DOOR™** mounting plate against skimmer opening and reinstall existing screws. Hand-tighten using a #3 Phillips head screwdriver. **DO NOT OVER TIGHTEN.**
- 4) Apply a thin bead of o-ring lubricant along the inside lip of the flexible lid to ensure a water tight seal.
- 5) Now when you are ready to seal off your skimmer – simply snap on the lid by pressing firmly around the entire perimeter for a positive seal.

No need to drain your water again! In the future, **SKIMMER DOOR™** will simply snap on and peel off. The **SKIMMER DOOR™** face plate will remain permanently installed on your skimmer. Use the **SKIMMER GUARD™** during the swim season.

**[www.skimmerdoor.com](http://www.skimmerdoor.com)**