

Grommet Details

Position the blue strap on the cover. With a razor knife cut an X through the strapping and the cover. Ensure that the X in the strapping is at least 1 1/2" from the end of the strap and that the X in the cover is at least 1 1/2" from the end of the cover. Use a piece of wood to avoid damaging anything under the cover while cutting.




Insert the female grommet (item #103) through the hole in the strapping and the cover. Ensure that the material is completely pushed down the shaft. Next insert the male grommet (item #101) into the female grommet. Once in place, hit the grommet gently with a hammer until they are secure.


(Caution - excess force will break grommet).



For irregular shaped pools, fold the cover and attach the strap as shown.

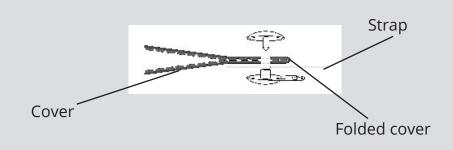

Using the self- tapping/drill screws (item #1), secure the strap to the tube.



Rocky's Reel Systems Inc.

Tel: 1-800-663-8705 E-Mail: info@rockys.ca For instructional videos and more visit: www.rockys.ca

