
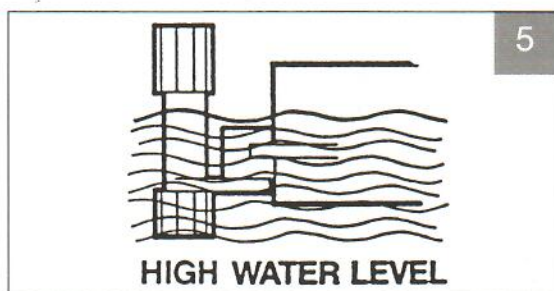
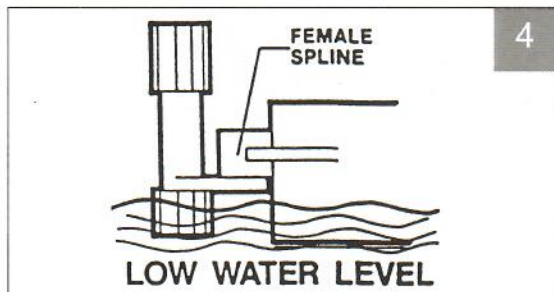
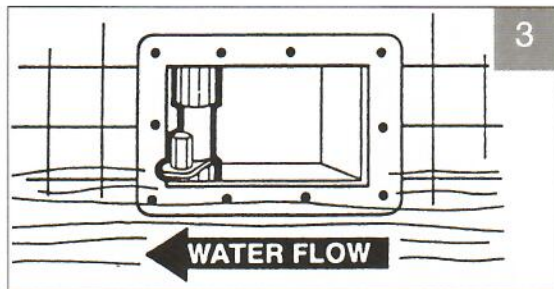
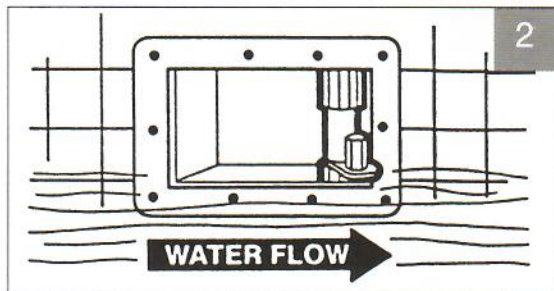


# SKIM-IT PATENTED

## INSTALLATION INSTRUCTIONS

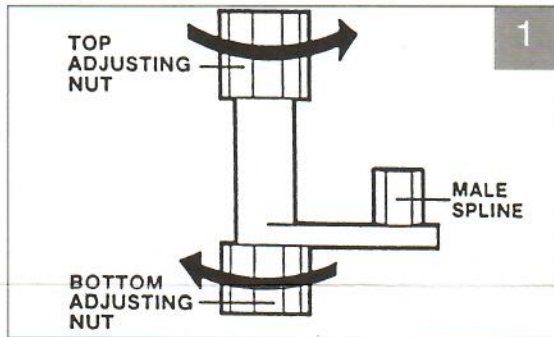

1. Screw adjusting nuts onto each end of the mounting bracket. If your pool is an inground with a ceramic skimmer, place the two end caps onto the adjusting nuts. If your pool has a plastic skimmer, the end caps may not be needed. (See diagram #1)
2. Place mounting bracket inside skimmer opening with the male spline facing toward the water.\* The mounting bracket must not interfere with the weir operation. Position mounting bracket on either side of opening depending on water flow direction. The mounting bracket must rest against the side of the skimmer opening so that it has a "stop." (See diagrams #2 & #3)
3. Screw the bottom adjusting nut down and the top adjusting nut up until the mounting bracket is held securely in place.
4. Place female end of blade over male spline of mounting bracket at desired angle for your water flow. For best results position blade at approximately 45 degree angle to skimmer.
5. Depending on water level, blade may be turned to achieve best results. (See diagrams #4 & #5)
6. Always remove blade from pool before swimming to prevent damage to Skim-It.

### PARTS LIST

1	DEFLECTOR BLADE	PT #6-00-80-01
1	MOUNTING BRACKET	PT #6-00-81-01
2	ADJUSTING NUT	PT #3-00-80
2	END CAP	PT #3-00-81

 **CONFER**  
*plastics inc.*

97 Witmer Road  
North Tonawanda, New York 14120  
Toll Free U.S. 800-635-3213  
716-694-3100/FAX: 716-694-3102